




Titan Series

IWW - Internal with Winch
Wire Halyard
Ground Set Installation

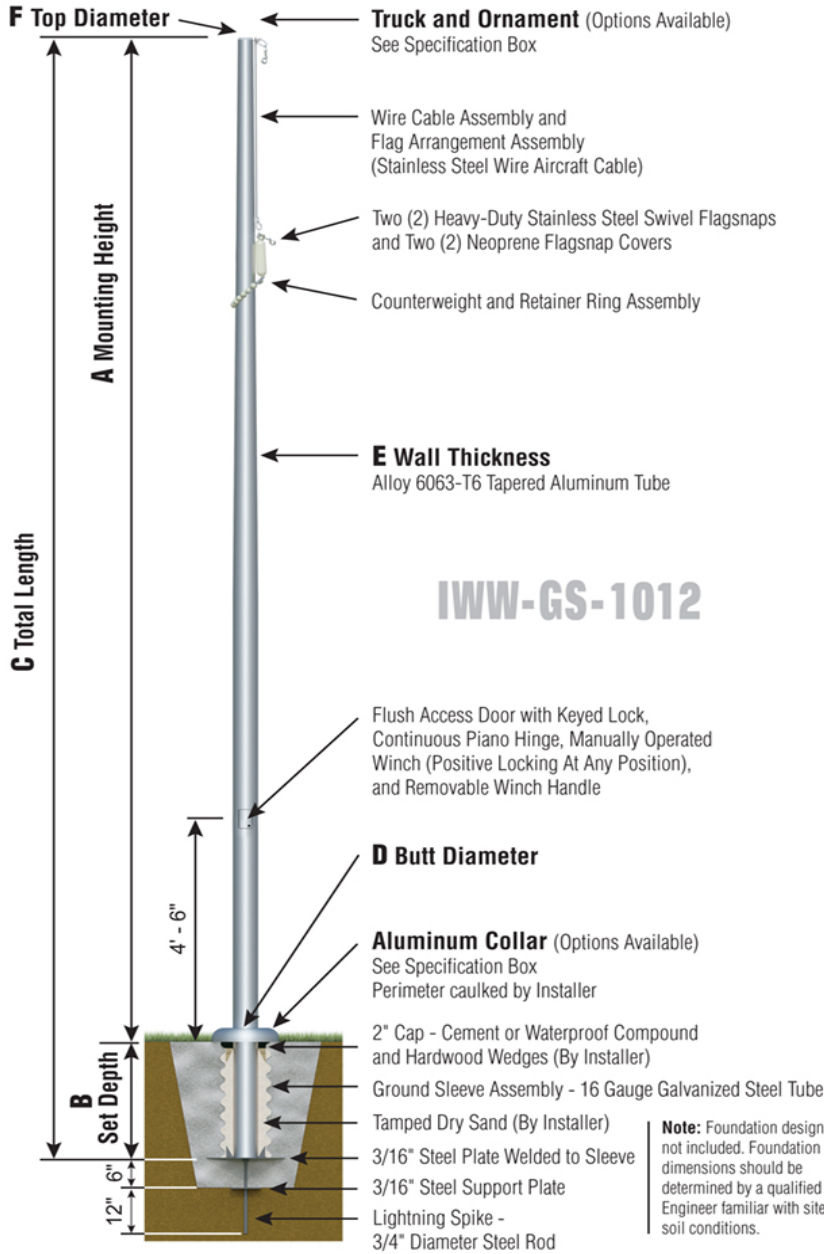

Note: Foundation design not included. Foundation dimensions should be determined by a qualified Engineer familiar with site soil conditions.

IWW50D13 - CLR



TRK-9800-58-CLR
Int. Revolving Truck
Sealed Bearings



BAL-1058-GLD
HD Gold Anodized
Aluminum Ball



COL1-A10C-CLR
FC-11 Cast Alum
1-Piece



CLR
Clear
Powder Coat



IWW - WINCH
Flush Mount
Hinged Door

NOTE: Flagpole Components on Anodized and Powder Coat flagpoles (excluding specified Ornaments and Ball Trucks) will match flagpole color specified.

Specifications
A. Mounting Height: 50'
B. Set Depth: 5'-0"
C. Total Length: 55'-0"
D. Butt Diameter: 10"
E. Wall Thickness: .188"
F. Top Diameter: 4"
Flagpole Sections: 3
Shaft Weight: 422 lbs.
Hardware Weight: 52 lbs.
Ground Sleeve Weight: 83 lbs.
* Max Flag Size: 10' x 15'
* Max Wind Speed w/Nylon Flag: 94 mph
* Max Wind Speed No Flag: 136 mph
* Wind Speed Specifications from ANSI/NAAMM FP 1001-07

Customer Name:	
Dealer: Flag Desk, Inc.	Qty: 1
Project:	Location:
Notes: For questions contact support@flagdesk.com, visit www.flagdesk.com, or call (800) 526-8183	

IWW50D13G-TAZ-O0F-C2D-ACL